
Voice Modules & Accessories

- Incorporate the KRONE LSA-PLUS® IDC Technique
- Available as Backmount Frame, surface or PCB mounted variants
- Simple to install using industry standard KRONE Insertion tool
- Easy 'tee-in' and 'bi-directional' look both ways testing without disrupting wiring
- Each contact accepts up to 2 wires of the same diameter
- Wide range of complementary accessories available
- Conform to OFTEL General Approval NS/G/23/L/100025

MODULES consist of two rows of contacts, one for permanent wiring, the other for jumper wires. The modules are available in four basic forms:





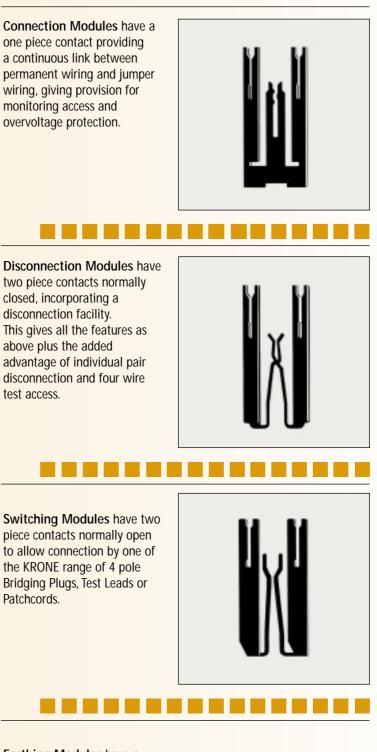


Earthing Modules have a one piece contact and earthing rail accommodating up to 2 identical wires per slot.

VOICE MODULES & ACCESSORIES

DISCONNECTION MODULE

10 pair LSA-PLUS[®] modules which contain two piece contacts normally closed. Has advantage of individual pair disconnection and four wire test access.




Dimensions are listed on page 5

Description	Pack Qty	BT Ref:	KRONE Product No
10 pair disconnection contacts, cream	10	Strips Connexion 237A	6089/1/810/00
10 pair disconnection contacts, green	10		6089/1/811/00
10 pair disconnection contacts, blue	10		6089/1/812/00

CONNECTION MODULE

10 pair LSA-PLUS[®] modules which contain a one piece contact providing a continuous link between wiring.



Dimensions are listed on page 5

Description	Pack Qty	BT Ref:	KRONE Product No
10 pair connection contacts	10	Strips Connexion 237B	6089/1/820/00
20 pair isolated disconnection contacts, no test access	10	Strips Connexion 237C	6089/1/830/00

EARTH MODULE


LSA-PLUS[®] modules with a one piece contact and earthing rail accommodating up to 2 identical wires per slot.



Dimensions are listed on page 5		Earthing module 237D	Earthing module 237D		
Description	Pack Qty	BT Ref:	KRONE Product No		
76 way, earth lead and terminal ring, red	10	Strips Connexion 237D	6089/1/840/00		
20 way, earth lead and terminal ring, red	10	Suchs Connexion 237E	6089/1/841/00		

SWITCHING MODULE Module remains disconnected until accessed via a bridging plug, offers a high density data patching 20 pair connection module with tee-in access via	capability, or	CARGERSTETE REAGEN
Dimensions are listed on page 5	Switch	hing module
Description	Pack Qty	KRONE Product No
10 pair, switching module, brown	10	6089/1/851/00
ABS DISCONNECTION MODULE		

Configured in six groups of three contacts for one pair and screen, provides a means of terminating cables for continuity.



Dimensions are listed on page 5

[Description	Pack Qty	KRONE Product No
	10 pair, ABS disconnection module	10	6504/1/810/00

LOW PROFILE CONNECTION MODULI	E	2000	
Low profile module can be tested using 2 pole test cord. We 2 pole test cord (6529/1/020/01)		Low profile connection	module
Description	Pack Qty	BT Ref:	KRONE Product No
10 pair, connection module, centre to centre fixing dimension 96mm, two earth contacts	10	Strips Connexion 241A	6196/1/001/11
10 pair, connection module, centre to centre fixing dimension 96mm	10	Strips Connexion 241B	6196/1/007/11
20 pair, connection module, centre to centre fixing dimension 170mm	10	Strips Connexion 242A	6196/2/002/00

INSERTION TOOL


Tool for LSA-PLUS® IDC termination. Inserts and crops wires simultaneously. Complete with extraction tool and stop clip.



Description	Pack Qty	BT Ref:	KRONE Product No
Insertion tool	1	Inserter Wire 2A	6417/1/810/02

10 PAIR LABEL HOLDER AND LABELS

Easy identification of terminations, for mounting on a 10 pair LSA-PLUS[®] module. No need to remove when using test plugs or inserting jumper wires. Labels can be ordered separately.

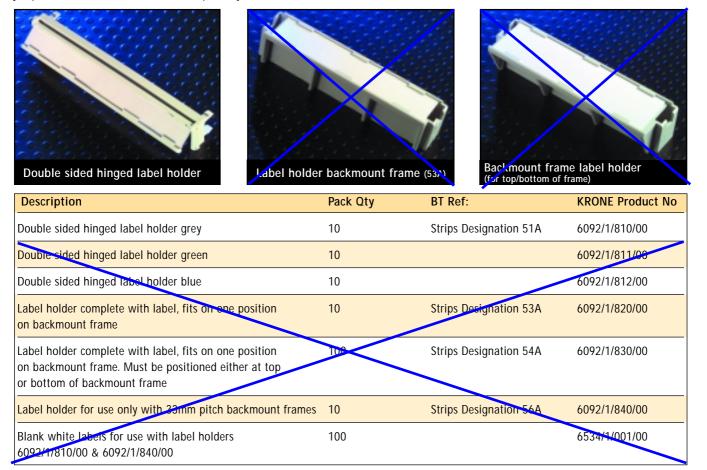

VOICE MODULE DIMENSIONS

